

# Level measurement

## Continuous level measurement – Ultrasonic controllers

### MultiRanger 100/200

#### Overview



MultiRanger is a versatile short to medium-range ultrasonic single and multi-vessel level monitor/controller for virtually any application in a wide range of industries.

#### Benefits

- Digital input for back-up level override from point level device
- Communication using built-in Modbus RTU via RS 485
- Compatible with SmartLinx system and SIMATIC PDM configuration software
- Single or dual point level monitoring
- Auto False-Echo Suppression for fixed obstruction avoidance
- Differential amplifier transceiver for common mode noise reduction and improved signal-to-noise ratio
- MultiRanger 100: level measurements, simple pump control, and level alarm functions
- MultiRanger 200: level, volume and flow measurements in open channels, differential control, extended pump control, and alarm functions
- Wall and panel mounting options

#### Application

MultiRanger can be used on different materials, including fuel oil, municipal waste, acids, woodchips, or on materials with high angles of repose. MultiRanger offers true dual point monitoring, digital communications with built-in Modbus RTU via RS 485, as well as compatibility with SIMATIC PDM, allowing PC configuration and setup. MultiRanger features Sonic Intelligence advanced echo-processing software for increased reading reliability.

MultiRanger 100 offers cost-effective level alarming, as well as on/off and alternating pump control. MultiRanger 200 will monitor open channel flow and features more advanced relay alarming and pump control functions as well as volume conversion.

It is compatible with chemical-resistant EchoMax transducers that can be used in hostile environments at temperatures as high as 145 °C (293 °F).

- Key Applications: wet wells, flumes/weirs, bar screen control, hoppers, chemical storage, liquid storage, crusher bins, dry solids storage

#### Design

The MultiRanger is available in wall or panel mounting options.

# Level measurement

## Continuous level measurement – Ultrasonic controllers

MultiRanger 100/200

### Technical specifications

| <b>Mode of operation</b>                      |  |
|---|--|
| Measuring principle                           | Ultrasonic level measurement   |
| Measuring range                               | 0.3 ... 15 m (1 ... 50 ft)   |
| Measuring points                              | 1 or 2   |
| <b>Input</b>                                  |  |
| • Analog (MultiRanger 200 only)               | 0 ... 20 mA or 4 ... 20 mA, from alternate device, scaleable   |
| • Discrete                                    | 10 ... 50 V DC switching level<br>Logical 0 ≤ 0.5 V DC<br>Logical 1 = 10 ... 50 V DC<br>Max. 3 mA  |
| <b>Output</b>                                 |  |
| EchoMax transducer                            | 44 kHz   |
| Ultrasonic transducer                         | Compatible transducers: ST-H and EchoMax series XPS-10, XPS 15/15F, and XRS-5  |
| Relays  | Rating 5 A at 250 V AC, non-inductive<br>1 SPST Form A   |
| • Version with 1 relay (MultiRanger 100 only) |  |
| • Version with 3 relays                       | 2 SPST Form A/1 SPDT Form C  |
| • Version with 6 relays                       | 4 SPST Form A/2 SPDT Form C  |
| mA output                                     | 0 ... 20 mA or 4 ... 20 mA   |
| • Max. load                                   | 750 Ω, isolated  |
| • Resolution                                  | 0.1 % of range   |
| <b>Accuracy</b>                               |  |
| Error in measurement                          | 0.25 % of range or 6 mm (0.24 inch), whichever is greater  |
| Resolution                                    | 0.1 % of measuring range <sup>1)</sup> or 2 mm (0.08 inch), whichever is greater   |
| Temperature compensation                      | <ul style="list-style-type: none"> <li>• -50 ... +150 °C (-58 ... +302 °F)</li> <li>• Integral temperature sensor</li> <li>• External TS-3 temperature sensor (optional)</li> <li>• Programmable fixed temperature values</li> </ul> |
| <b>Rated operating conditions</b>             |  |
| Installation conditions                       |  |
| • Location                                    | Indoor/outdoor   |
| • Installation category                       | II   |
| • Pollution degree                            | 4  |
| Ambient conditions                            |  |
| • Ambient temperature (housing)               | -20 ... +50 °C (-4 ... +122 °F)  |

| <b>Design</b>  |  |
|--|--|
| Weight   |  |
| • Wall mount   | 1.37 kg (3.02 lb)  |
| • Panel mount  | 1.50 kg (3.31 lb)  |
| Material (enclosure)                                 | Polycarbonate  |
| Degree of protection (enclosure)                     |  |
| • Wall mount   | IP65/Type 4X/NEMA 4X   |
| • Panel mount  | IP54/Type 3/NEMA 3   |
| Electrical connection                                |  |
| • Transducer and mA output signal                    | 2-core copper conductor, twisted, shielded, 0.5 ... 0.75 mm <sup>2</sup> (22 ... 18 AWG), Belden 8760 or equivalent is acceptable<br>365 m (1 200 ft)  |
| • Max. separation between transducer and transceiver |  |
| <b>Displays and controls</b>                         |  |
| Programming  | 100 x 40 mm (4 x 1.5 inch) multi-block LCD with backlighting<br>Programming using hand-held programmer, SIMATIC PDM or via PC with Dolphin Plus software   |
| <b>Power supply</b>                                  |  |
| • AC version   | 100 ... 230 V AC ± 15 %, 50/60 Hz, 36 VA (17 W)  |
| • DC version   | 12 ... 30 V DC (20 W)  |
| <b>Certificates and approvals</b>                    |  |
|  | <ul style="list-style-type: none"> <li>• CE, C-TICK<sup>2)</sup></li> <li>• Lloyd's Register of Shipping</li> <li>• ABS Type Approval</li> <li>• FM, CSA<sub>US/C</sub>, UL listed</li> <li>• CSA Class I, Div. 2, Groups A, B, C and D, Class II, Div.2, Groups F and G, Class III (wall mount only), ATEX II 3D</li> </ul>             |
| <b>Communication</b>                                 |  |
|  | <ul style="list-style-type: none"> <li>• RS 232 with Modbus RTU or ASCII via RJ-11 connector</li> <li>• RS 485 with Modbus RTU or ASCII via terminal strips</li> <li>• Optional: SmartLinX cards for <ul style="list-style-type: none"> <li>- PROFIBUS DP</li> <li>- DeviceNet</li> <li>- Allen-BradleyRemote I/O</li> </ul> </li> </ul> |

<sup>1)</sup> Program range is defined as the empty distance to the face of the transducer plus any range extension

<sup>2)</sup> EMC performance available on request

# Level measurement

## Continuous level measurement – Ultrasonic controllers

### MultiRanger 100/200

| Selection and Ordering data   | Article No.     |
|---|-----------------|
| <b>MultiRanger 100/200</b><br>Versatile short to medium-range ultrasonic single and multi-vessel level monitor/controller for virtually any application in a wide range of industries | <b>7ML5033-</b> |
| <b>Versions</b>   |                 |
| MultiRanger 100, level measurement only   | 1               |
| MultiRanger 200, level, volume, flow and differential measurements  | 2               |
| <b>Mounting, enclosure design</b>   |                 |
| Wall mount, standard enclosure  | A               |
| Wall mount, 4 entries, 4 M20 cable glands included  | B               |
| Panel mount (CE, CSA <sub>US/IC</sub> , FM, UL)   | C               |
| <b>Power supply</b>   |                 |
| 100 ... 230 V AC  | A               |
| 12 ... 30 V DC  | B               |
| <b>Number of measurement points</b>   |                 |
| Single point version  | 0               |
| Dual point version  | 1               |
| <b>Communication (SmartLinX)</b>  |                 |
| Without module  | 0               |
| SmartLinX PROFIBUS DP module  | 2               |
| SmartLinX DeviceNet module<br>See SmartLinX product page 4/339 for more information.  | 3               |
| <b>Output relays</b>  |                 |
| 3 relays (2 Form A, 1 Form C), 250 V AC   | 1               |
| 6 relays (4 Form A, 2 Form C), 250 V AC   | 2               |
| 1 relay (1 Form A), 250 V AC<br>(available on MultiRanger 100 model only)   | 3               |
| <b>Approvals</b>  |                 |
| General Purpose CE, FM, CSA <sub>US/IC</sub> , UL listed, C-TICK  | A               |
| CSA Class I, Div. 2, Groups A, B, C and D; Class II, Div 2, Groups F and G; Class III <sup>1)</sup>   | B               |
| ATEX II 3D <sup>2)</sup>  | C               |

1) For wall mount applications only

2) For standard enclosure wall mount, option A only

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.


| Selection and Ordering data  | Order code             |
|--|------------------------|
| <b>Further designs</b>   |                        |
| Please add "-Z" to Article No. and specify Order code(s).  |                        |
| Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: ◆   | <b>Y15</b>             |
| Measuring-point number/identification (max. 27 characters) specify in plain text   |                        |
| <b>Operating Instructions</b>  | Article No.            |
| English  | <b>7ML1998-5FB06</b>   |
| French   | <b>7ML1998-5FB13</b>   |
| Spanish  | <b>7ML1998-5FB23</b>   |
| German   | <b>7ML1998-5FB36</b>   |
| Quick Start guide, multi-language<br>Note: The Operating Instructions should be ordered as a separate item on the order.<br>This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library. | <b>7ML1998-5QD83</b>   |
| <b>Other Operating Instructions</b>  |                        |
| SmartLinX Allen-Bradley Remote I/O, English  | <b>7ML1998-1AP03</b>   |
| SmartLinX PROFIBUS DP, English   | <b>7ML1998-1AQ03</b>   |
| SmartLinX PROFIBUS DP, German  | <b>7ML1998-1AQ33</b>   |
| SmartLinX PROFIBUS DP, French  | <b>7ML1998-1AQ13</b>   |
| SmartLinX DeviceNet, English<br>Note: The appropriate SmartLinX Operating Instructions should be ordered as a separate line on the order.  | <b>7ML1998-1BH02</b>   |
| <b>Accessories</b>   |                        |
| Handheld programmer  | <b>7ML1830-2AK</b>     |
| Tag, stainless steel, 12 x 45 mm (0.47 x 1.77 inch), one text line, suitable for enclosure   | <b>7ML1930-1AC</b>     |
| M20 cable gland kit (4 M20 cable glands, 4 M20 nuts, 4 washers)  | <b>7ML1930-1FV</b>     |
| Sunshield kit, 304 stainless steel   | <b>7ML1930-1GA</b>     |
| SITRANS RD100 Remote display - see Chapter 7   |                        |
| SITRANS RD200 Remote display - see Chapter 7   |                        |
| SITRANS RD500 web, datalogging, alarming, ethernet, and modem support for instrumentation - see Chapter 7  | <b>7ML5750-1AA00-0</b> |
| <b>Spare parts</b>   |                        |
| Power Supply Board (100 ... 230 V AC)  | <b>7ML1830-1MD</b>     |
| Power Supply Board (12 ... 30 V DC)  | <b>7ML1830-1ME</b>     |
| Display Board  | <b>7ML1830-1MF</b>     |

# Level measurement

## Continuous level measurement – Ultrasonic controllers


MultiRanger 100/200

### Dimensional drawings

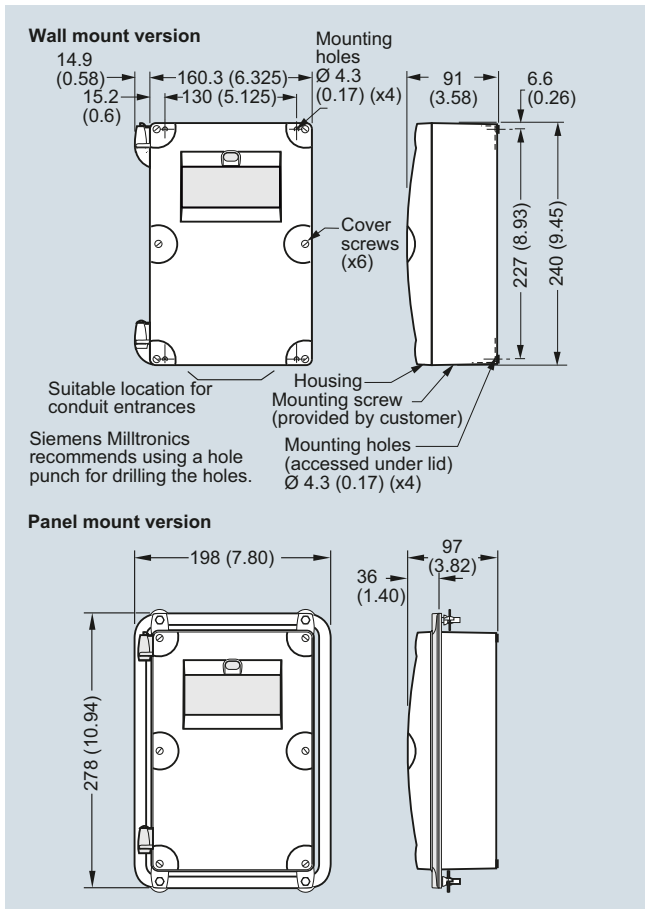

MultiRanger, dimensions in mm (inch)

### Schematics

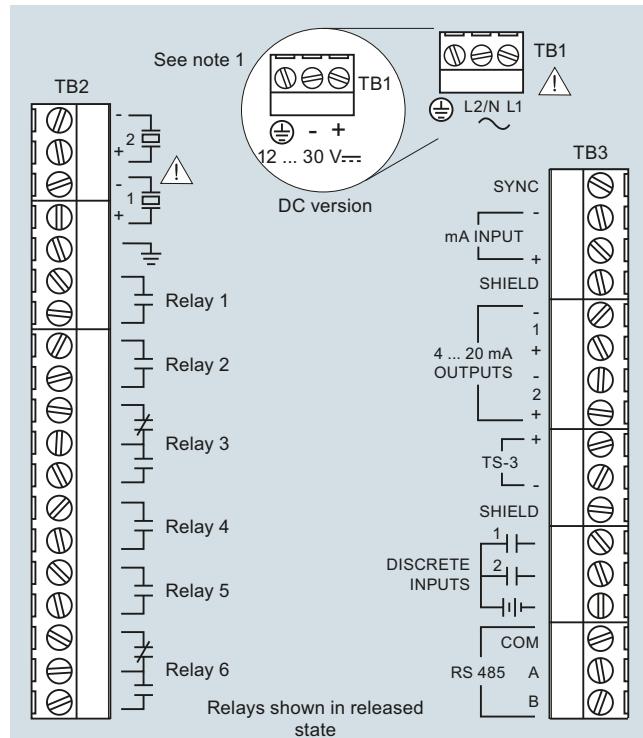

**Note:**

1. Use 2-core copper wire, twisted, with shield, for expansion up to 365 m (1 200 ft). Route cable in grounded metal conduit, separate from other cables.
2. Verify that all system components are installed in accordance with instructions.
3. Connect all cable shields to the MultiRanger shield connections. Avoid differential ground potentials by not connecting cable shields to ground (earth) anywhere else.
4. Keep exposed conductors on shielded cables as short as possible to reduce noise on the line caused by stray transmissions and noise pickup.

MultiRanger connections

4